

# WIRELESS SAFETY TRANSMITTER



## Easy-to-integrate wireless alarm signal transmitter - with cellular communication

Land-line based security systems are the past. They are more expensive to operate and less secure than modern cellular-based security systems. No need to replace the whole system, only the signal transmitter module. Upgrade to cellular today.

The device is our reliable cellular alarm signal transmitter and remote input monitoring device for security systems.


It is suitable for both alarm signaling, input monitoring (through its I/Os) and can even be used to control connected devices (like gates) remotely.

The communicator receives the incoming alarm signals from connected security sensors through the tip-ring plug and transmits alarm signals to the security monitoring or dispatch center through the SIA DC-09 (Contact ID) protocol.

The device can be configured remotely using our EasyTerm config tool, or via SMS messages.

It emits periodic life signals and provides detection and notification capabilities of wire cut sabotage. The output line can be switched remotely (for gate opening, device control).

Alarms or events can be configured to send immediate SMS notification (up to 4 phone numbers). The device can be ordered with 2G or 4G LTE / 2G „fallback“ cellular module.

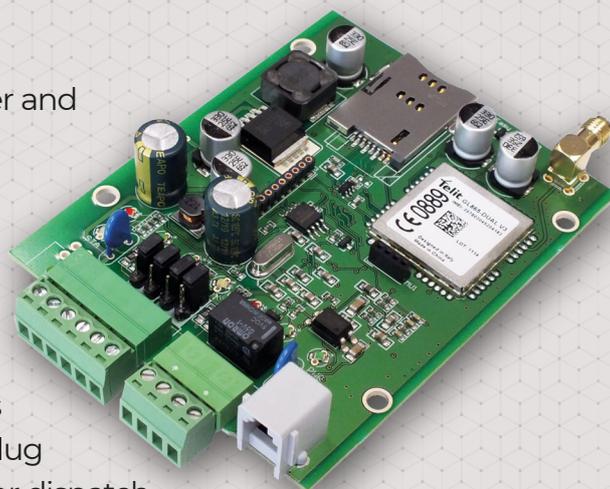

## MAIN FEATURES

- Retrofit your land-line security system with our cellular alarm transmitter so you will not need to replace the whole system to have a future-proof solution
- Use it as backup alarm transmission channel (GSM voice or data)
- Connect external devices you would like to control remotely
- Extend the system with further I/Os (optional expansion)
- Connect an extra siren, a spare battery pack, or a sabotage switch to the device and provide thus the highest level of safety for your home, office, company

## APPLICATION

- DISPATCHING CENTERS
- COMPANIES
- OFFICES, HOTELS
- RESIDENTIAL COMMUNITIES



# WIRELESS SAFETY TRANSMITTER





## COMMUNICATION

- GSM communication (GSM voice call signaling, supporting the traditional dispatching centers)
- Alarm signaling on cellular network

## MAIN FEATURES

- Alarm signaling to primary and secondary IP addresses
- Reception of voltage/contact signals
- Contact ID (CID) codes, DTM encoding
- SIA DTMF / SIA DC-09 protocol
- Life signals, Zones, event handling
- SMS notification (alarms, reports)
- Output switch (modes: mono-stable and bi-stable, delay is configurable)
- Gate opening (via RJ11, by SMS text, phone call, via TCP)
- Managing a contact list for output control
- Optional siren usage
- EasyTerm® configuration software
- Configuration by SMS text messages
- Firmware refresh and reconfiguration (on RJ11, TCP)
- Compatibility with IP receivers, SIMS Cloud® software

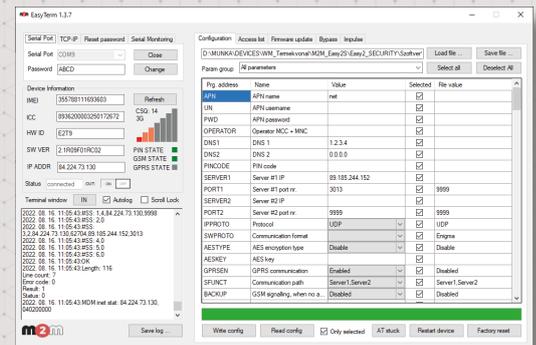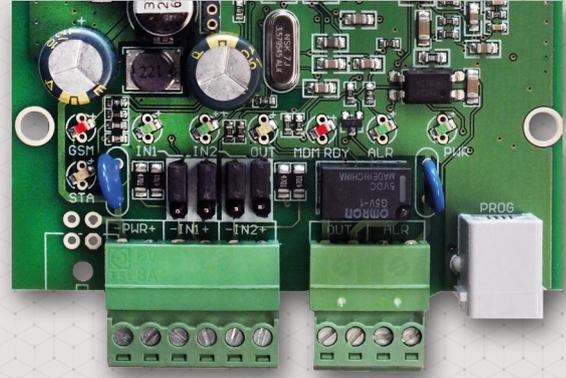

Wireless Safety Transmitter®		2G
Power	Voltage	• Power voltage: 8-24VDC
	Current	• Stand-by: 45-95mA @12V • Max.: 160-300mA @12V (according to module type)
Communication module	Mobile technology	• 2G
	Module type	• Telit GL865-DUAL v3.1
	Bands / Frequency (MHz)	• GSM/GPRS (2G): B3 (1800), B8 (900)
	Speed (DL/UL)	• GPRS: 80/40 kbps
	SIM card slot	• mini SIM (2FF, push-insert)
	Antenna connector	• 2G (SMA, 50 Ohm)
Communication	Protocol	• Alarm center signaling protocol - TCP/UDP based communication - Contact ID (SIA DTMF, SIA DC-09)
	Compatibility	• Contact ID compatible devices - IP receivers (such as Enigma®, IP2 Receiver®) - SIMS Cloud® dispatching software
Interface	Inputs, interface connectors	• 2pcs inputs (configurable by jumpers), input modes: • voltage (galvanical independent, high signal level: 2-24V, low signal level: 0-1V) - terminal block connector • contact (0.33mA, short, 10kOhm resistor detection) - terminal block connector • 1pc relay output (switch/control, 2A 120V AC, 1A 24V DC) - terminal block connector • ALARM TIP RING (simulated analog phone line) - terminal block • Power connector (8-24VDC), terminal block - power source from alarm system's 12VDC or by an external DC power source or battery • RJ11 connector (configuration, firmware refresh) • IO-expansion PCB (further 6pcs inputs, 3pcs relay outputs) - order option
		Configuration
User interface	Operation LEDs	• 5 operation LEDs (alarm, inputs, output, operation, cellular signal strength)
	Temperature	• Operating: from -40°C to 70°C degree (at 0-95% rel. humidity) • Storage: from -40°C to +80°C degree (at 0-95% rel. humidity)
Construction	Outfit	• PCB edition, IP21 protection - mountable by screws or can be installed into the safety alarm center's aluminum enclosure
	Dimensions / Weight	• 96 x 77 x 22mm - 160gr



The presented images on the datasheet are for illustration purposes only. The details on the data sheet are for general information purposes only. WM Systems LLC cannot be held liable for erroneous information on the datasheet. The announced information are subject to change without notice. For more details, please contact us.